

# GTO<sup>®</sup>/ACCESS SYSTEMS

## PROFESSIONAL RESIDENTIAL

### PRO-SW4000XLS SWING GATE OPERATOR


For swing gates up to 20 ft. (6.1 m) long and 1000 lbs. (453.6 kg) per leaf.

Technology • Innovation • Quality  
Since 1987



## XLS IMPROVEMENTS

- Increased operating speed by 10%
- NEW rev-counter board with reed switch technology (backward compatible)
- Reinstated larger control box
- Reinstated heavy duty hardware for 1000 lb. - 20 ft. gates
- IMPROVED front mount and scraper seal design

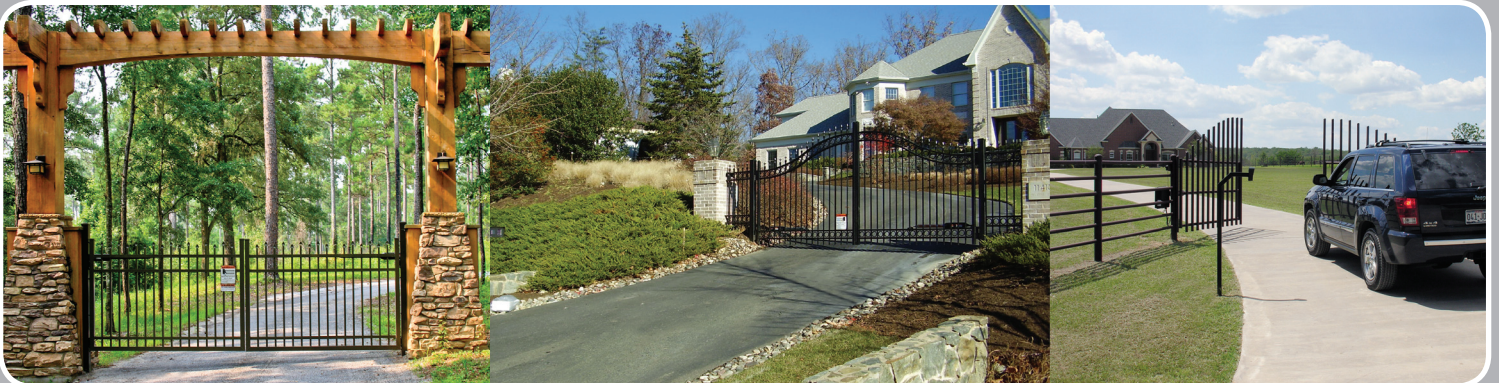

Available From:

(800) 878-7829

[gateopenerking.com](http://gateopenerking.com)



rev-03/16/12



Includes battery backup, radio receiver, entry transmitter, AC transformer and all necessary mounting hardware for a post mounted installation, 19" (48.3 cm) total offset.

## PRO-SW4000XLS

### SWING GATE OPERATOR

### RESIDENTIAL SERIES

The PRO-SW4000XLS/4200XLS series will operate a gate up to 20 ft. (6.1 m) long and weighing 1000 lbs. (453 kg) each leaf if all proper installation procedures have been followed. Ball bearing hinges should be used on all gates weighing over 250 lbs. (113.4 kg).

#### FEATURES:

- ▶ One button auto-memorization of digital transmitter code.
- ▶ Includes battery backup, 318 MHz RF radio receiver, entry transmitter, AC transformer and all necessary mounting hardware for a post mounted installation, 19" (48.3 cm) total offset.

#### MECHANICAL:

- The GTO® control board can be programmed for pull-to-open or push-to-open.
- Operating temp -5 F (-21C) to +160 F (71 C).
- Opening time: from 18 to 20 seconds (typical installation).
- Range of arm stroke: is up to 22" (56 cm).
- Operator length: with arm fully retracted is 46.25" (118 cm), mounting point to mounting point.
- Operation, diagnostic and safety alarms.
- Inherent obstruction sensing.
- Soft start/soft stop—for long mechanical life expectancy.
- Auto close adjustable 3–120 seconds delay.

#### ELECTRICAL/POWER:

- 12 Volt DC / 7.0 amp hour, sealed, rechargeable battery (included). Battery charge is maintained by a 120V AC/60 Hz input, 18V AC, 40 VA output, transformer through control board.
- Powered by a reliable 12 Volt (120 Watt) DC motor, 16:1 planetary gear drive system.
- Charging regulated circuit on control board. "Sleep draw" is 15 mA; "active draw" is 3 to 7 amps.

#### SHIPPING WEIGHT:

4000XLS Kit 45 lbs. (21 kg);  
4200XLS 34 lbs. (16 kg);  
Meets UPS shipping standards.

#### WARRANTY:

2 Year (RESIDENTIAL application)

#### CLASS OF OPERATION:

Class I

#### SAFETY LISTINGS:

System Certified with UL325 5th Edition safety standards, ETL listed.

#### OPTIONS:

**Solar Power:** For dual gates, we recommend a minimum of 10 watts. (*FM123*)

**Dual Gates:** The PRO-SW4200XLS works as a second gate operator when combined with a PRO-SW4000XLS. Includes 50 ft. (15.2m) power cable.

**Push to Open applications:** require one Push-to-Open bracket per operator (*R4KPTO* per operator).

#### SUGGESTED ACCESSORIES:

- Automatic Gate Lock (*FM144*)
- Residential Intercom/Keypad (*F3100MBC*)